

Features

- Built in emergency circuit. 3 hour Battery Back-up available
- Easy installation and replacement
- 5 year Warranty
- Module Lens radiused to the exact radius of the handrail
- LIA certified and tested

Lighting Specification

CRI 80

Wattage 7.2W

Lumens Up to 738lm



Efficacy 102.5lm/W

Voltage 24V DC Constant Voltage

Controls DALI, On/Off and Dimmable



Lighting Distribution

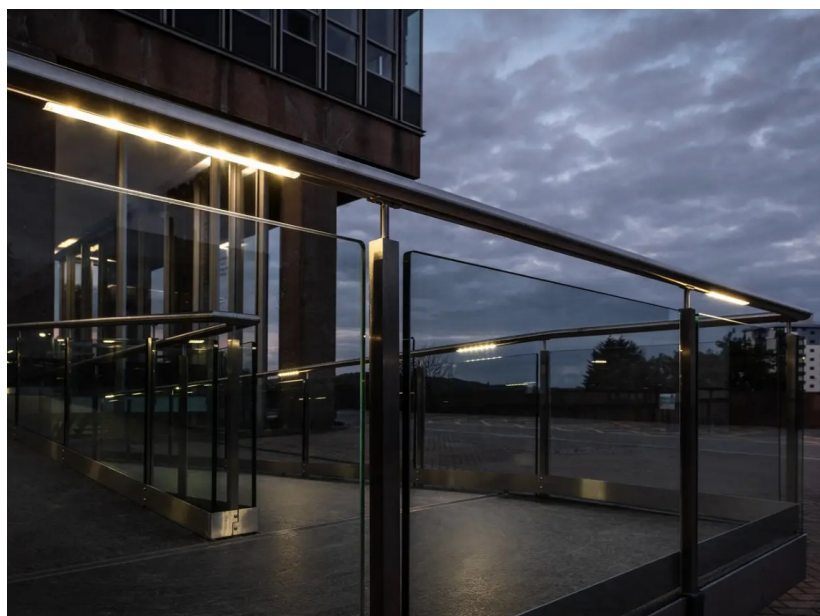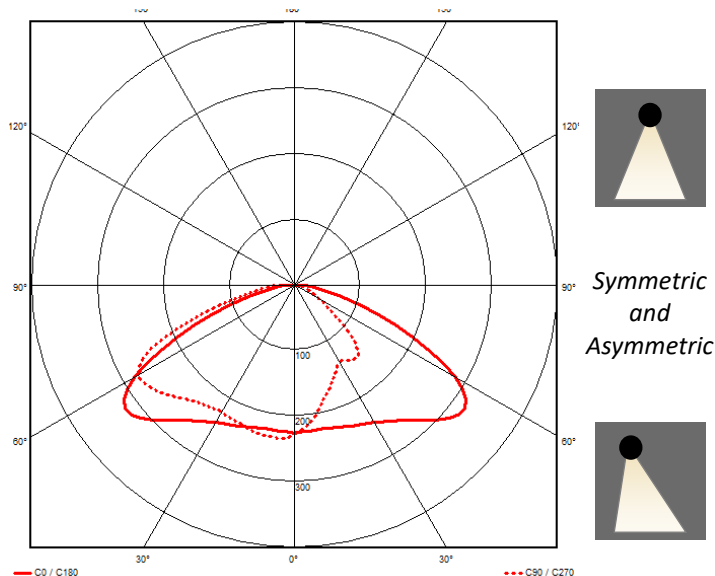

Mechanical

Size 306mm x 22mm

Material Polycarbonate anti-microbial

Lens Clear or Diffused

Fixings Tamper resistant stainless steel




Handrail

Size 48.3mm x 2mm Ø

Material Grade 304L or 316L Stainless Steel

Finish Brushed SS, Bead Blasted SS,
Powder coated

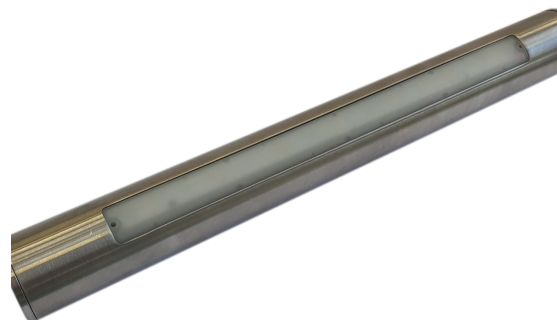

Footfall Lighting Ltd

4 – 6 Roughmoor Enterprise Centre, Williton, Somerset TA4 4AT
www.footfalllighting.co.uk

TE-D-068(V1.0)